


HESPERUS™ Series

Touch Remote Switch

HCSB

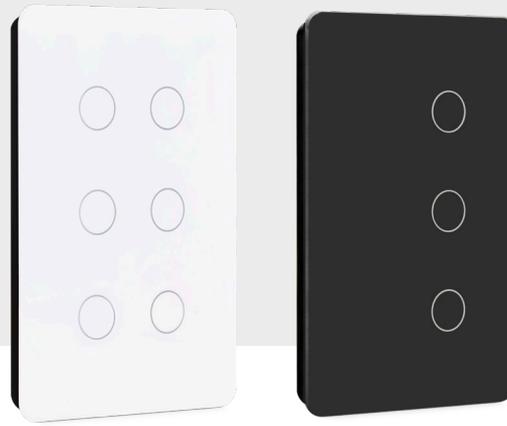

1,2,3,4,6-Button capacitive touch remote control switch

FEATURES

- Slim (11mm plate depth), contemporary design with choice of 15 luxury colours
- Polished glass fascia suitable for hygienic practices
- UV stabilised to avoid discolouring
- Capacitive touch buttons can be programmed to perform a variety of in-room and whole home control functions, for remote control of all KASTA devices
- Button labelling: text can be custom-engraved on the fascia for a personalised design
- Flexibility to program and re-program during and after commissioning
- 8-way multiway control with KASTA dimmer/switch
- Short press for ON/OFF control
- Long press for dimming or fan speed control
- Reliable Bluetooth® mesh network connectivity to all your KASTA devices
- Fits standard first fix mounting accessories (e.g. C-clips, nail brackets, wall boxes)
- Flush mounting centres (not recessed) for quicker installation
- Backed off terminal screws and deep tunnels allow fast fitment of cables
- Insulated screw caps hinged to the grid plate to provide IP2X rating on mounting screws
- iOS and Android app setup and control
- 3 year warranty

ORDERING CODE

H1CSB-WH		
(number of buttons)	(plate finish)	
1 - One button	WH - White	AM - Amber
2 - Two buttons	BK - Black	GN - Green
3 - Three buttons	SM - Storm	MT - Mint
4 - Four buttons	GY - Grey	AL - Almond
6 - Six buttons	BU - Blue	TP - Taupe
	SL - Steel	GD - Gold
	RD - Red	BR - Brown
	CR - Crimson Red	


SPECIFICATIONS

Power Supply	220-240V a.c.
Operating Ambient Temperature	-20 to 40°C
IP Rating	IP20
Plate Depth	11mm
Terminal Size	16mm ² (accommodates 4x2.5mm ² cables)
Terminal Screw Type	Flat Terminal Screw
Mounting Points	84mm / 100mm and Corners
Mounting Screw Type	Combination Flat / Philips Head Screws
Frame Colour / Finish	White Matte / Black Matte
Plate Colour / Finish	15 colours (see below) / Transparent
Housing Material	Tempered Glass / Polycarbonate (PC)
LED Indicators	Blue
Standards Complied	AS/NZS 62368.1, AS/NZS 4268, AS/NZS CISPR 32

COLOURS



CONNECTION

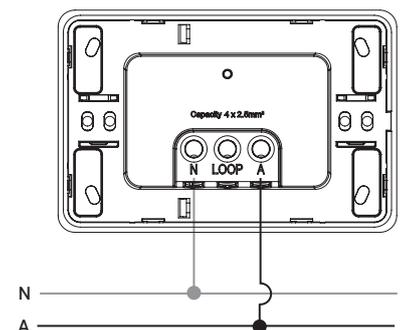

DIMENSIONS

