

Australian Monitor ATC10,ATC15, ATC30 Horn Speakers







ATC10,15,30


The Australian Monitor ATC10 15 and 30 speakers are Constant Voltage Horn speakers designed for rugged and high performance applications. The tough Metal and ABS plastic construction makes it perfect for outdoor or indoor

The units are supplied with supervisory capacitors to allow monitoring within an emergency evacuation system

The ATC 10, 15 and 30 produce amazing clarity and are an extremely cost effective solution

Key features include

- >10, 15 and 30 Watts rated RMS power respectively
- >Adjustable power tappings to 100%, 50%, 25%, 12.5% and 8 Ohm
- >Frequency Response from 300Hz to 14KHz
- > Sensitivity > 106db (1w/1m)
- >120, 110 and 100 degree dispersion respectively
- >1.3, 3.2 and 3.5Kg Models

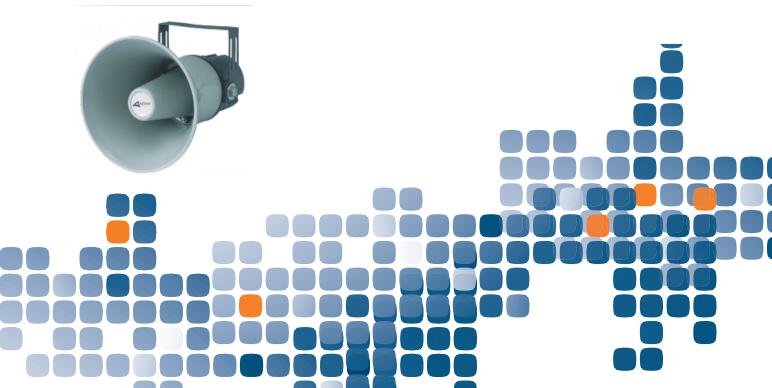

ATC10

Rated Power (RMS)	10 W
Power Taps	10W, 5W, 2.5W, 1.25W, 8 Ohm
Sensitivity	106db(1W 1M)
Freq. Range	300 Hz- 8 KHz
Dispersion	120 degree
Weight	1.3 Kg

ATC15

Rated Power (RMS)	15 W
Power Taps	15W, 7.5W, 3.75W, 1.87W, 8 Ohm
Sensitivity	108db(1W 1M)
Freq. Range	125Hz-14 KHz
Dispersion	110 degree
Weight	3.2 Kg
Water Protection	IP66

ATC30

Rated Power (RMS)	30 W
Power Taps	30W,15W, 7.5W, 3.75W, 8 Ohm
Sensitivity	110db(1W 1M)
Freq. Range	125 Hz- 14 KHz
Dispersion	100 degree
Weight	3.5Kg
Water Protection	IP66

ENGINEERED BY AUSTRALIAN MONITOR

4a/ 6 Albert St, Preston, Victoria, Australia International enquiries email: international@australianmonitor.com.au



www.australianmonitor.com.au

NSW QLD ACT WA VIC SA NZ
P: 02 9647 1411 P: 07 3852 1312 P: 02 6228 1477 P: 08 9204 0200 P: 03 9890 7477 P: 08 8408 8300 P: 09 415 9426

E: nsw@hillssvl.com.au E: qld@hillssvl.com.auE: act@hillssvl.com.au E: wa@hillssvl.com.au E: vic@hillssvl.com.au E: sa@hillssvl.com.au E: sales@hillssvl.com.au